


## ARCTIC™ 3X6% FREEZE PROTECTED ATC™ FOAM CONCENTRATE

# CONCENTRATES



# SOLBERG

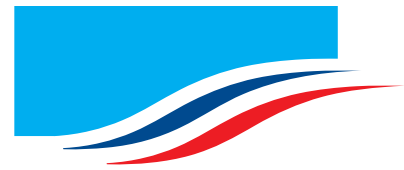

### Description

ARCTIC™ 3X6 FP ATC foam concentrate from SOLBERG® is a synthetic alcohol-resistant freeze protected foam concentrate used to effectively extinguish Class B hydrocarbon fuel fires at 3% and polar solvent fuel fires at 6% solution. ARCTIC 3X6 FP ATC foam concentrate provides rapid extinguishment and excellent burn back characteristics and can be used with fresh, sea and brackish water.

### Application

ARCTIC 3X6 FP ATC foam concentrate can be applied to either Class B hydrocarbon or polar solvent fuel fires. The product is mixed 3 parts foam concentrate to 97 parts water for hydrocarbon fuels or 6 parts foam concentrates to 94 parts water for polar solvent fuels. The foam can be used to prevent re-ignition of a liquid spill and control hazardous vapors. Foam non-air aspirating, as well as air aspirating equipment, including standard fire sprinkler heads, can be used to obtain maximum results.

ARCTIC 3X6 FP ATC foam is compatible with most powder (dry chemical) agents.

### Performance

#### Fire Performance

ARCTIC 3X6 FP ATC foam concentrate has been tested to and meets the fire performance test criteria of European Standard EN1568 Parts 3 & 4 (latest edition).

#### Foam Proportioning

ARCTIC 3X6 FP ATC foam concentrate can be proportioned at the proper foam solution percentage using most common proportioning devices such as:

- Eductors
- Inline balance pressure proportioners
- Ratio controllers
- Self-inducting nozzles

#### Storage

The storage temperature range for ARCTIC 3x6 FP ATC foam concentrate is 0 °F to 120 °F (-18 °C to 49 °C).

### Typical Physical Properties at 77 °F (25 °C)

Appearance:	Clear, light yellow liquid
Freezing Point:	0 °F (-18 °C) <i>(No quality loss after thawing)</i>
Maximum storage temp:	120 °F (49 °C)
pH:	7.0 - 8.0
Refractive index:	1.3640 - 1.3740
Specific gravity:	1.020 - 1.035
Viscosity:	1600 - 2100 cP*
Sediments:	None

\*Brookfield Viscometer Spindle #4, Speed 30 rpm

When stored in original containers or in manufacturer recommended equipment and within the specified temperature range, the shelf life is 20 years.

### Compatibility

ARCTIC 3X6 FP ATC foam concentrate should not be mixed with other foam concentrates. For questions about compatibility or mixing of foam concentrates, consult Solberg Technical Services.

**SOLBERG is a member of PERIMETER SOLUTIONS, a global producer of leading fire retardant, gel and foam brands with a singular purpose: revolutionize the course of fire suppression technology with safer, more effective and more sustainable solutions. Together, we are Moving Industries Forward by Redefining Fire Suppression. [www.solbergfoam.com](http://www.solbergfoam.com)**



**Materials of Construction Compatibility**

ARCTIC 3X6 FP ATC foam concentrate is compatible with multiple materials of construction such as carbon steel, stainless steel, brass, polyethylene and PVC. Galvanized steel should not be used in direct contact with the foam concentrate. For questions about material compatibility, consult Solberg Technical Services.

**Inspection**

ARCTIC 3X6 FP ATC foam concentrate or pre-mix solutions should be inspected annually per National Fire Protection Association (NFPA)

Standards 11 and 25. A sample of the foam concentrate should be sent to the manufacturer for quality conditioning testing in accordance to NFPA 11.

**Environmental Information**

ARCTIC 3X6 FP ATC foam concentrate complies with the United States Environmental Protection Agency (USEPA) Stewardship Program—2015 Requirements.

**Certifications**

SOLBERG manufactured products are thoroughly inspected and

undergo rigorous quality control tests. These evaluations analyze the foam’s physical parameters and finished product’s fire performance. A Certificate of Analysis (CoA) is issued with every batch.

ARCTIC 3X6 FP ATC foam concentrate is Approved to European Standard EN1568 Parts 3 & 4.

**Ordering Information**

ARCTIC 3x6 FP ATC foam concentrate is available in pails, drums, totes and bulk quantities.

PART NO.	DESCRIPTION	APPROXIMATE SHIPPING WEIGHT	APPROXIMATE CUBE
20190	ARCTIC 3X6 FP ATC, 5 gallon (20 litre) pail	45 lb (21 kg)	1.25 ft <sup>3</sup> (0.04 m <sup>3</sup> )
20191	ARCTIC 3X6 FP ATC, 55 gallon (200 litre) drum	495 lb (224 kg)	11.83 ft <sup>3</sup> (0.33 m <sup>3</sup> )
20192	ARCTIC 3X6 FP ATC, 265 gallon (1000 litre) tote	2465 lb (1118 kg)	50.05 ft <sup>3</sup> (1.42 m <sup>3</sup> )
20193	ARCTIC 3X6 FP ATC, bulk	Call Customer Services	



NOTICE: Perimeter Solutions makes no representations or warranties as to the completeness or accuracy of the information included herein. The information contained herein is not intended to provide regulatory, legal or expert advice relating to the products, its application or uses. Nothing contained herein is to be construed as a recommendation to use any product, process, equipment or formulation in conflict with any industrial property or intellectual property rights, and Perimeter Solutions makes no representation or warranty, express or implied, that the use thereof will not infringe on any industrial property or intellectual property rights. NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESSED OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO THE INFORMATION CONTAINED HEREIN.

SOLBERGFOAM.COM

FORM NUMBER F-2014001-1

COPYRIGHT © 2014. ALL RIGHTS RESERVED. SOLBERG®, ARCTIC™ AND ATC™ ARE TRADEMARKS OF PERIMETER SOLUTIONS LP OR ITS AFFILIATES.

**PERIMETER SOLUTIONS**  
THE SOLBERG COMPANY  
1520 Brookfield Avenue  
Green Bay, WI 54313  
USA  
Tel: +1 920 593 9445

**PERIMETER SOLUTIONS**  
AUXQUIMIA S.A.U.  
Poligono de Baiña, Parcela 23  
33682 Mieres (Asturias)  
Spain  
Tel: +34 985 24 29 45

**PERIMETER SOLUTIONS**  
SOLBERG ASIA PACIFIC PTY LTD  
3 Charles Street  
St. Marys NSW 2760  
Australia  
Tel: +61 2 9673 5300