


RE-HEALING™ RF3, 3% FOAM CONCENTRATE

# CONCENTRATES



# SOLBERG

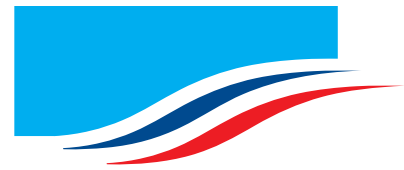

## Description

RE-HEALING™ RF3 foam concentrate from SOLBERG® is an innovative environmentally sustainable fluorosurfactant and fluoropolymer-free foam concentrate used to effectively extinguish Class B hydrocarbon fuel fires. Proportioned at 3% solution, RE-HEALING RF3 foam concentrate can be used in fresh, salt or brackish water. RE-HEALING RF3 foam possesses excellent burn back resistance due to its remarkable flow and rapid resealing characteristics. RE-HEALING foam concentrates are formulated using a new high performance synthetic foam technology to replace traditional AFFF, FFFP foam concentrates and older protein and fluoroprotein foams. RE-HEALING RF3 foam concentrate contains no sediments.

## Application

RE-HEALING RF3 foam concentrate is intended for use on Class B hydrocarbon fuel fires. It is not intended for use on Class B polar solvent fuels. The foam can be used to prevent re-ignition of a liquid spill

and control hazardous vapors. On Class A fuels, RE-HEALING RF3 foam will improve extinguishment in deep-seated fires. Foam discharge devices such as air aspirating, as well as, non-air aspirating equipment, including standard fire sprinkler heads, can be used to obtain maximum results. The product is mixed 3 part foam concentrate to 97 parts water. It may also be used as a 3% pre-mix solution. RE-HEALING RF3 foam is compatible with most dry powder (chemical) agents.†

## Performance

### Fire Performance

RE-HEALING RF3 foam concentrate has been tested to and meets the fire performance test criteria of Underwriters Laboratories, Inc. (UL) Standard 162, Underwriters' Laboratories of Canada (ULC) Standard S564, FM Approval Standard 5130, European Standard EN 1568 Part 3 and International Civil Aviation Organization (ICAO) Levels B and C.

### Foam Proportioning

RE-HEALING RF3 foam concentrate can be proportioned at the proper foam solution percentage using

## Typical Physical Properties at 77 °F (25 °C)

Appearance:	Brown liquid
Freezing Point:	23 °F (-5 °C) <i>(No quality loss after thawing)</i>
Maximum storage temp:	120 °F (49 °C)
pH:	7.0 - 8.0
Refractive index:	1.3865 - 1.3869
Specific gravity:	1.06 - 1.10
Viscosity:	4900 - 5300 cP*
Sediments:	<0.05%

\*Brookfield Viscometer Spindle #4, Speed 30 rpm

common foam proportioning devices†† such as:

- Eductors
- Inline balanced pressure proportioners
- Ratio controllers
- Self-educing nozzles

## Storage

The storage temperature range for RE-HEALING RF3 foam concentrate is 35 °F to 120 °F (1.7 °C to 49 °C).

When stored in original containers or in manufacturer recommended equipment and within the specified temperature range, the shelf life is 20 years.

**SOLBERG is a member of PERIMETER SOLUTIONS, a global producer of leading fire retardant, gel and foam brands with a singular purpose: revolutionize the course of fire suppression technology with safer, more effective and more sustainable solutions. Together, we are Moving Industries Forward by Redefining Fire Suppression. [www.solbergfoam.com](http://www.solbergfoam.com)**



**Compatibility**

RE-HEALING RF3 foam concentrate should not be mixed with other foam concentrates. For questions about compatibility or mixing, consult Solberg Technical Services.

**Materials of Construction Compatibility**

RE-HEALING RF3 foam concentrate is compatible with multiple materials of construction such as carbon steel, stainless steel, brass, polyethylene and PVC. Galvanized steel should not be used in direct contact with the foam concentrate. For questions about materials of construction compatibility, consult Solberg Technical Services.

**Inspection**

RE-HEALING RF3 foam concentrate or pre-mix solution should be inspected annually per National Fire Protection Association (NFPA)

Standards 11 and 25. A sample of the foam concentrate should be sent to the manufacturer for quality conditioning testing in accordance to NFPA 11.

**Environmental Information**

RE-HEALING foam concentrates are fluorosurfactant, fluoropolymer-free products for use on Class B hydrocarbon fuels with no environmental concerns for persistence, bioaccumulation or toxic break down.

**Certifications**

SOLBERG manufactured products are thoroughly inspected and undergo rigorous quality control tests. These evaluations analyze the foam’s physical parameters as well as the finished product’s fire performance. A Certificate of Analysis (CoA) is issued with every batch.

RE-HEALING RF3 foam concentrate is Underwriters Laboratories, Inc. Listed in accordance with UL 162 (Standard for Safety for Foam Equipment and Liquid Concentrates), Underwriters’ Laboratories of Canada Listed (Standard for Category 1 Foam Liquid Concentrates ULC S564), FM Approved per Approval Standard 5130, European Norm (EN) Standard 1568 Part 3 Approved and International Civil Aviation Organization (ICAO) Airport Services Manual (DOC 9137-AN/898) Part 1 - Rescue and Firefighting, Levels B and C Certified.

**Ordering Information**

RE-HEALING RF3 foam concentrate is available in pails, drums, totes and bulk quantities.

† Not an FM Approved Configuration

†† See FM Approval Guide

PART NO.	DESCRIPTION	APPROXIMATE SHIPPING WEIGHT	APPROXIMATE CUBE
20020	RE-HEALING RF3, 3%, 5 gallon (20 litre) pail	45 lb (21 kg)	1.25 ft <sup>3</sup> (0.04 m <sup>3</sup> )
20021	RE-HEALING RF3, 3%, 55 gallon (200 litre) drum	495 lb (224 kg)	11.83 ft <sup>3</sup> (0.33 m <sup>3</sup> )
20022	RE-HEALING RF3, 3%, 265 gallon (1000 litre) tote	2465 lb (1118 kg)	50.05 ft <sup>3</sup> (1.42 m <sup>3</sup> )
20023	RE-HEALING RF3, 3%, bulk	Call Customer Services	



NOTICE: Perimeter Solutions makes no representations or warranties as to the completeness or accuracy of the information included herein. The information contained herein is not intended to provide regulatory, legal or expert advice relating to the products, its application or uses. Nothing contained herein is to be construed as a recommendation to use any product, process, equipment or formulation in conflict with any industrial property or intellectual property rights, and Perimeter Solutions makes no representation or warranty, express or implied, that the use thereof will not infringe on any industrial property or intellectual property rights. NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESSED OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO THE INFORMATION CONTAINED HEREIN.

SOLBERGFOAM.COM

FORM NUMBER F-2013005-6

COPYRIGHT © 2014. ALL RIGHTS RESERVED. SOLBERG® AND RE-HEALING™ ARE TRADEMARKS OF PERIMETER SOLUTIONS LP OR ITS AFFILIATES.

PERIMETER SOLUTIONS  
THE SOLBERG COMPANY  
1520 Brookfield Avenue  
Green Bay, WI 54313  
USA  
Tel: +1 920 593 9445

PERIMETER SOLUTIONS  
AUXQUIMIA S.A.U.  
Polígono de Baiña, Parcela 23  
33682 Mieres (Asturias)  
Spain  
Tel: +34 985 24 29 45

PERIMETER SOLUTIONS  
SOLBERG ASIA PACIFIC PTY LTD  
3 Charles Street  
St. Marys NSW 2760  
Australia  
Tel: +61 2 9673 5300