CONTINUOUS FLOW HOSE REEL





Features

Grease zert fittings in both supports

Magna-cast aluminum support

Manual rewind

Multiple hose capabilities

Open side design allows faster hose drying

Single person operation

Tension knob



SOLBERG® Continuous Flow Hose Reel assemblies are manufactured with magna-cast aluminum supports and brass waterway. It also features a 1.5" (38mm) non-collapsible booster hose and brass 90-degree elbow inlet swivel with male 1.5" (38mm) NST outlet. The carbon steel reel was designed to store and deploy continuous flow hose, which allows liquid to flow while the hose is still on the reel.



Application

The hose reel assembly may be used for firefighting and/or wash down. Hose reels may also be installed in areas that require supplemental fire protection.

Specifications

Capacity: 1.5" X 100' hose (38 mm X 30 m) Pressure Rating: 200 psi (14 bar)

Reel Weight: 90 lb (41 kg)

Options


- Available in stainless steel, galvanized or marine grade aluminum
- Hand crank
- Handline nozzle with multiple flows
- Vinyl cover
- High mounting stand




Solberg is a global company that is a one-stop resource for firefighting foam concentrates and custom-designed foam suppression systems hardware, offering both traditional and innovative firefighting foam technology. www.solbergfoam.com



Dimensional Information

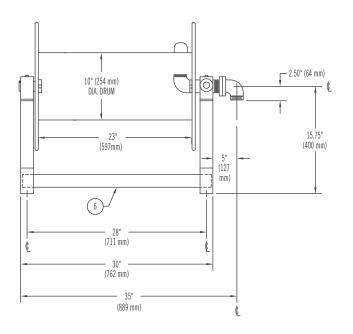



Ordering Information

APPROXIMATE SHIPPING WEIGHT PART NO. **DESCRIPTION** lb kg

35310	Continuous Flow Hose Reel, Model SCHR-50, 50' (15 meter) Hose	142	64
35311	Continuous Flow Hose Reel, Model SCHR-75, 75' (23 meter) Hose	165	75
35312	Continuous Flow Hose Reel, Model SCHR-100, 100' (30 meter) Hose	194	88
35313	Continuous Flow Hose Reel, Model SCHR-150, 150' (46 meter) Hose	246	111

${\sf EMEA}$

Norway Tel: +47 56 34 97 00

ASIA-PACIFIC

SOLBERG ASIA PACIFIC PTY LTD 3 Charles Street St. Marys NSW 2760 Australia Tel: +61 2 9673 5300