

INDUSTRIAL NOZZLES - TFT

HARDWARE



Description

The Task Force Tips® ZN and ZM INDUSTRIAL NOZZLES are a simple and rugged industrial nozzle with superior stream quality and reach. This fixed flow fog nozzle rated at 100 psi (7 bar) is available with an optional flow rate of 350, 500, 750, 1000 or 1250 (1325, 1893, 2839, 3785 or 4732 l/min).





The fog angle is user adjustable between 120 degree wide fog and straight stream. The nozzle's baffle can be removed with a wrench for flushing debris. The standard inlet is 2.5" NH, NPSH, or BSP (65 mm) female thread. The simple and basic design requires no grease or other maintenance. The rubber bumper is UV resistant. The fixed gpm water nozzle is hardcoat anodized ANSI A356.0 T6 aluminum. The fixed gpm nozzle can be used with water or premixed foam solution.



Specifications




K-factor	User Specified K-factor = 15 - 75
Operation Energy Source	Manual
Flow Control Method	Fixed flow at a pressure (constant flow rate; flow does not change with pattern)
Flow Rate	User Specified K-factor
Coupling Size (Nozzles)	2.5 inch (65 mm)
Coupling Style (Nozzles)	Rocker
Coupling Swiveling/Rigid (Nozzles)	Rigid
Pressure	100 psi (7 bar)
Fog Pattern Method	Molded rubber teeth (fixed)
Pattern Actuation Method	Manual
Nozzle Bumper Material	Rubber - press fit
Certifications	N/A

NOTE: Shown in full fog position



Solberg is a member of THE AMEREX GROUP, an alliance of independent companies with a singular purpose: revolutionize the course of fire suppression technology with safer, more effective, and more sustainable solutions. Together, we are Moving Industries Forward by Redefining Fire Suppression. www.solbergfoam.com

Reach Charts

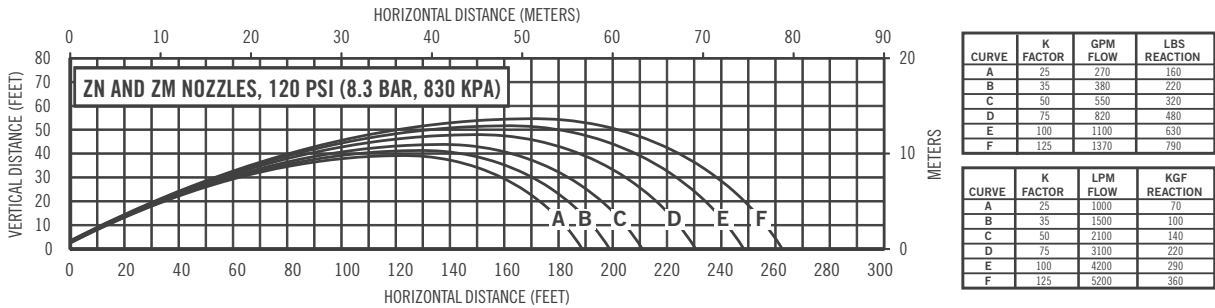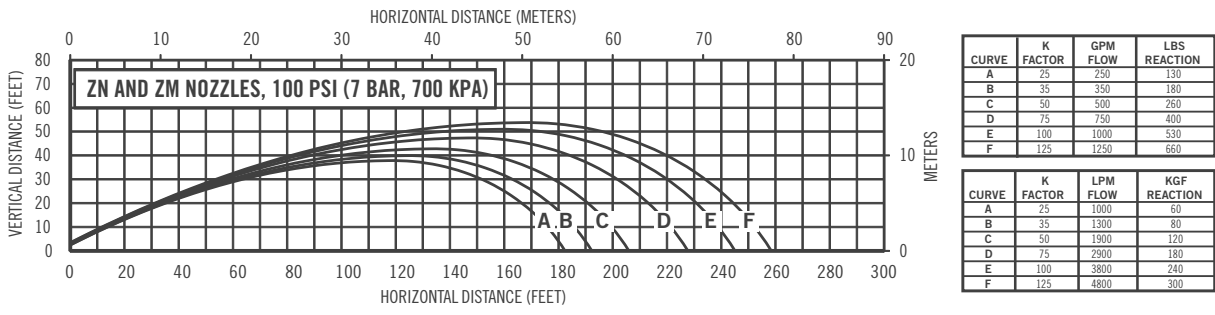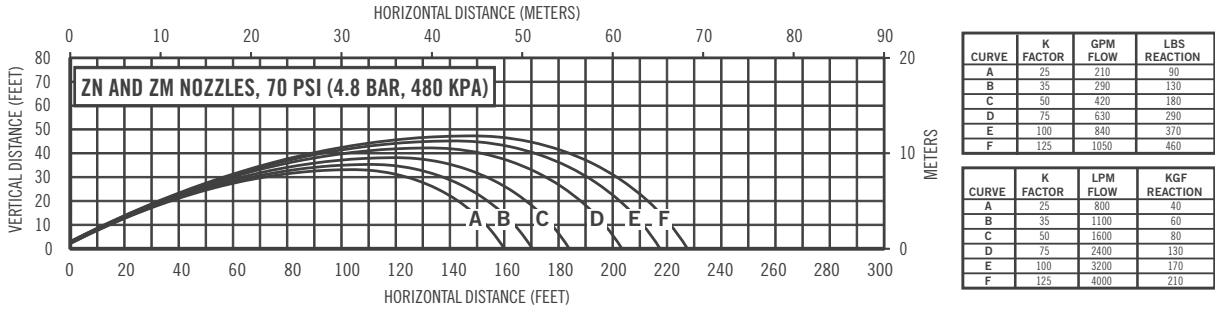

Ordering Information

INDUSTRIAL NOZZLES

PART NO.	DESCRIPTION	APPROXIMATE SHIPPING WEIGHT	
		lb	kg
32230	ZN Industrial Nozzle - TFT, 350 gpm (1325 l/min)	4	2
32231	ZN Industrial Nozzle - TFT, 500 gpm (1893 l/min)	4	2
32232	ZN Industrial Nozzle - TFT, 750 gpm (2839 l/min)	4	2
32237	ZM Industrial Nozzle - TFT, 1000 gpm (3785 l/min)	4	2
32238	ZM Industrial Nozzle - TFT, 1250 gpm (4732 l/min)	4	2

Note: Must specify K-factor at time of order



SOLBERGFOAM.COM

FORM NUMBER F-2016011
 COPYRIGHT © 2016. ALL RIGHTS RESERVED.
 SOLBERG IS A TRADEMARK OF THE SOLBERG COMPANY OR ITS AFFILIATES.
 TASK FORCE TIPS® IS A REGISTERED TRADEMARK OF TASK FORCE TIPS, INC.
 TFT® IS A REGISTERED TRADEMARK OF TASK FORCE TIPS, INC.

AMERICAS
 THE SOLBERG COMPANY
 1520 Brookfield Avenue
 Green Bay, WI 54313
 USA
 Tel: +1 920 593 9445

EMEA
 SOLBERG SCANDINAVIAN AS
 Radøyvegen 721 - Olsvollstranda
 N-5938 Sæbøvågen
 Norway
 Tel: +47 56 34 97 00

ASIA-PACIFIC
 SOLBERG ASIA PACIFIC PTY LTD
 3 Charles Street
 St. Marys NSW 2760
 Australia
 Tel: +61 2 9673 5300