

## FIRE-BRAKE™ FOAM CONCENTRATE

# CONCENTRATES



### Description

FIRE-BRAKE™ foam concentrate from SOLBERG® is a synthetic firefighting foam concentrate specially designed to be used for wildland, structural and other Class A fuel fires. FIRE-BRAKE foam concentrate has the ability to reduce the surface tension of water, which substantially increases water's overall wetting capability. This creates a faster penetration and greater fire control when attacking combustible Class A fuels. FIRE-BRAKE foam concentrate can be proportioned at the rate of 0.1 - 1% in fresh, sea and brackish water.

### Application

FIRE-BRAKE foam concentrate is designed and applied to Class A fires including wood, paper, coal, rubber, wildland and structure fires. FIRE-BRAKE foam concentrate is compatible with conventional firefighting equipment such as non-air aspirating and air aspirating foam nozzles, Compressed Air Foam Systems (CAFS), rotary and fixed wing aircraft, low, medium and high expansion devices and has

an admixture rate of 0.1% to 1.0% depending on use. FIRE-BRAKE should not be mixed with other foam concentrates.

### Application Rates

Recommended application rates—  
FIRE-BRAKE foam concentrate:

#### Mop-up: 0.25%

Suited for mop-up/overhaul, quickly penetrates Class A substrates

#### Initial Suppression: 0.5%

Penetrates tree canopies, draining to the forest floor layers and direct attack for structural firefighting

#### Fire Brake: 0.75%

Good for initial suppression or forming a barrier


#### Protection: 1.0%

Adheres and insulates vertical surfaces  
The minimum admixture rate on other Class A fuel types is 0.1%.

### Performance

#### Fire Performance

FIRE-BRAKE foam concentrate has been tested to and meets the performance requirements of the U.S. Forest Service, Qualified Products List, Specification 5100-307a (as

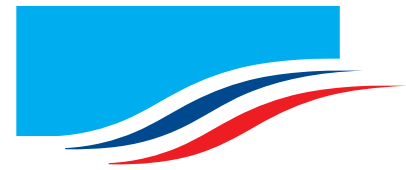

# SOLBERG

### Typical Physical Properties at 77 °F (25 °C)

Appearance:	Clear, light yellow liquid
Freezing Point:	27 °F (- 3 °C) <i>(No quality loss after thawing)</i>
Maximum storage temp:	120 °F (49 °C)
pH:	7.0 - 8.5
Refractive index:	1.3555 - 1.3595
Specific gravity:	1.000 - 1.040
Viscosity:	3.0 - 5.0 cSt*
Sediments:	<0.05%

\*Cannon-Fenske Viscometer

amended) for the applications as determined during the product evaluation and shown on the QPL, and meets the requirements of National Fire Protection Association (NFPA) 1150—Standard on Foam Chemicals for Fires in Class A Fuels (current edition).

### Foam Proportioning

FIRE-BRAKE foam concentrate can be proportioned using most proportioning equipment:

- Balanced pressure pump systems
- Bladder tank systems
- CAFS
- Eductors (with metering orifice)

**SOLBERG is a member of PERIMETER SOLUTIONS, a global producer of leading fire retardant, gel and foam brands with a singular purpose: revolutionize the course of fire suppression technology with safer, more effective and more sustainable solutions. Together, we are Moving Industries Forward by Redefining Fire Suppression. [www.solbergfoam.com](http://www.solbergfoam.com)**



**Storage**

The storage temperature range for FIRE-BRAKE foam concentrate is 27 °F to 120 °F (-3 °C to 49 °C). When stored in original containers or in manufacturer recommended equipment and within the specified temperature range, the shelf life is 10 years or more.

**Compatibility**

FIRE-BRAKE foam concentrate should not be mixed with other foam concentrates. However, when the foam solution is applied to a fire the product can be mixed with other similar foam types. For questions about compatibility or mixing, consult Solberg Technical Services.

**Materials of Construction Compatibility**

FIRE-BRAKE foam concentrate is compatible with multiple materials

of construction such as carbon steel, stainless steel, brass, polyethylene and PVC. Galvanized steel should not be used in direct contact with the foam concentrate. For questions about material compatibility, consult Solberg Technical Services.

**Environmental Information**

SOLBERG FIRE-BRAKE is biodegradable. When used and disposed of properly, this product does not adversely affected aquatic life. SOLBERG FIRE-BRAKE Class A foam concentrate does not contain any PFAS ingredients commonly found in fluorinated Class B foam concentrates. Perimeter Solutions foam manufacturing process is intentionally separated between fluorinated and non-fluorinated concentrate types, thus eliminating the potential for cross contamination or residual contamination.

**Certifications**

FIRE-BRAKE Class A foam concentrate is Qualified Products Listed (QPL) by the U.S. Forest Service in accordance with Forest Service Specification 5100-307a.

**Ordering Information**

FIRE-BRAKE foam concentrate is available in pails, drums, totes and bulk quantities.

PART NO.	DESCRIPTION	APPROXIMATE SHIPPING WEIGHT	APPROXIMATE CUBE
20001	FIRE-BRAKE, 5 gallon (20 litre) pail	45 lb (21 kg)	1.25 ft <sup>3</sup> (0.04 m <sup>3</sup> )
20002	FIRE-BRAKE, 55 gallon (200 litre) drum	495 lb (224 kg)	11.83 ft <sup>3</sup> (0.33 m <sup>3</sup> )
20003	FIRE-BRAKE, 265 gallon (1000 litre) tote	2465 lb (1118 kg)	50.05 ft <sup>3</sup> (1.42 m <sup>3</sup> )
20004	FIRE-BRAKE, bulk	Call Customer Services	



NOTICE: Perimeter Solutions makes no representations or warranties as to the completeness or accuracy of the information included herein. The information contained herein is not intended to provide regulatory, legal or expert advice relating to the products, its application or uses. Nothing contained herein is to be construed as a recommendation to use any product, process, equipment or formulation in conflict with any industrial property or intellectual property rights, and Perimeter Solutions makes no representation or warranty, express or implied, that the use thereof will not infringe on any industrial property or intellectual property rights. NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESSED OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO THE INFORMATION CONTAINED HEREIN.

SOLBERGFOAM.COM

FORM NUMBER F-2011006-4

COPYRIGHT © 2014. ALL RIGHTS RESERVED. SOLBERG® AND FIRE-BRAKE™ ARE TRADEMARKS OF PERIMETER SOLUTIONS LP OR ITS AFFILIATES.

**AMERICAS**  
PERIMETER SOLUTIONS, LP  
1520 Brookfield Avenue  
Green Bay, WI 54313  
USA  
Tel: +1 920 593 9445

**EMEA**  
PERIMETER SOLUTIONS, LP  
Polígono de Baiña, Parcela 23  
33682 Mieres (Asturias)  
Spain  
Tel: +34 985 24 29 45

**ASIA PACIFIC**  
PERIMETER SOLUTIONS, LP  
3 Charles Street  
St. Marys NSW 2760  
Australia  
Tel: +61 2 9673 5300