

VARIABLE RANGE PUMP PROPORTIONER

HARDWARE



Features

Bronze and stainless steel material construction for performance and durability

Fresh, sea and brackish water compatible

Horizontal or vertical mounted position

Description

The SOLBERG® Variable Range Pump Proportioner is a foam solution proportioning device, designed to accurately proportion the foam concentrate into the water stream at both high and low system flow rates. The SOLBERG Variable Range Pump Proportioner is designed as an integral component of the SOLBERG foam pump proportioning system.

The SOLBERG Variable Range Pump Proportioner complies with NFPA 30, the Flammable and Combustible Liquids Code, Paragraph 16.5.1.6.2, which states that foam/water sprinkler systems are to provide foam solution to operating sprinklers with 4 sprinklers flowing. The SOLBERG Variable Range Pump Proportioner meets this Code requirement.

Application

The SOLBERG Variable Range Pump Proportioner is designed for systems where proportioning of foam concentrate will begin at low flow rates, but as additional sprinklers operate, the proportioner will automatically adjust for the changes in system flow rates and maintain accurate foam concentrate proportioning. Considering that the fire data shows that only 4 to 5 sprinklers will be necessary to control the flammable liquid fire risks, the SOLBERG Variable Pump Range Proportioner is the perfect solution for low system flow proportioning.

The primary applications for the SOLBERG Variable Range Pump Proportioner include closed-head foam/water sprinkler systems, protecting risks such as flammable and combustible liquid storage rooms, chemical processing, loading racks, aircraft hangars, and tank farm protection systems using foam chambers.

Specifications

The SOLBERG Variable Range Pump Proportioner is acceptable for use with SOLBERG foam concentrates, when



used as an integral component of a SOLBERG foam pump proportioning system. The SOLBERG Variable Range Pump Proportioner is designed to be installed as a between-the-flange proportioner, in standard DN150 (6") or DN200 (8") system piping. The foam concentrate inlet is DN50 (2") or DN65 (2.5") BSP female pipe size depending on the proportioner size selected.

The proportioner will accurately proportion foam concentrate at flow rates of 70 to 7000 l/min (18 to 1850 gpm) for DN150 (6"), and 150 to 15000 l/min (40 to 3963 gpm) for DN200 (8") sizes^[1].

^[1] The unit will operate with higher flows if the foam system can accept a higher pressure loss.

Solberg is a global company that is a one-stop resource for firefighting foam concentrates and custom-designed foam suppression systems hardware, offering both traditional and innovative firefighting foam technology. www.solbergfoam.com

The SOLBERG Variable Range Pump Proportioner is manufactured using a bronze body and cone shaped piston, stainless steel spring, and stainless steel foam metering orifice. The SOLBERG Variable Range Pump Proportioner is to be installed with a minimum of 5 pipe diameters (762 mm (30.0")) of straight pipe both upstream and downstream of the proportioner. The proportioner body is


cast with a directional flow arrow on the proportioner body indicating the proper orientation of installation.

The SOLBERG Variable Range Pump Proportioner operation in closed-head sprinkler systems is as follows:

Under static, no flow conditions in the water supply piping, the water and foam concentrate pressures are equal. During a fire situation as sprinklers

begin to open, the foam concentrate is injected into the water supply through the foam concentrate metering orifice at the proper listed solution rate. As more sprinklers begin to operate, the change in foam-water solution demand is automatically adjusted for by the SOLBERG Variable Range Pump Proportioner, by injecting a carefully calibrated increased quantity of foam concentrate into the piping.

Dimensional Information

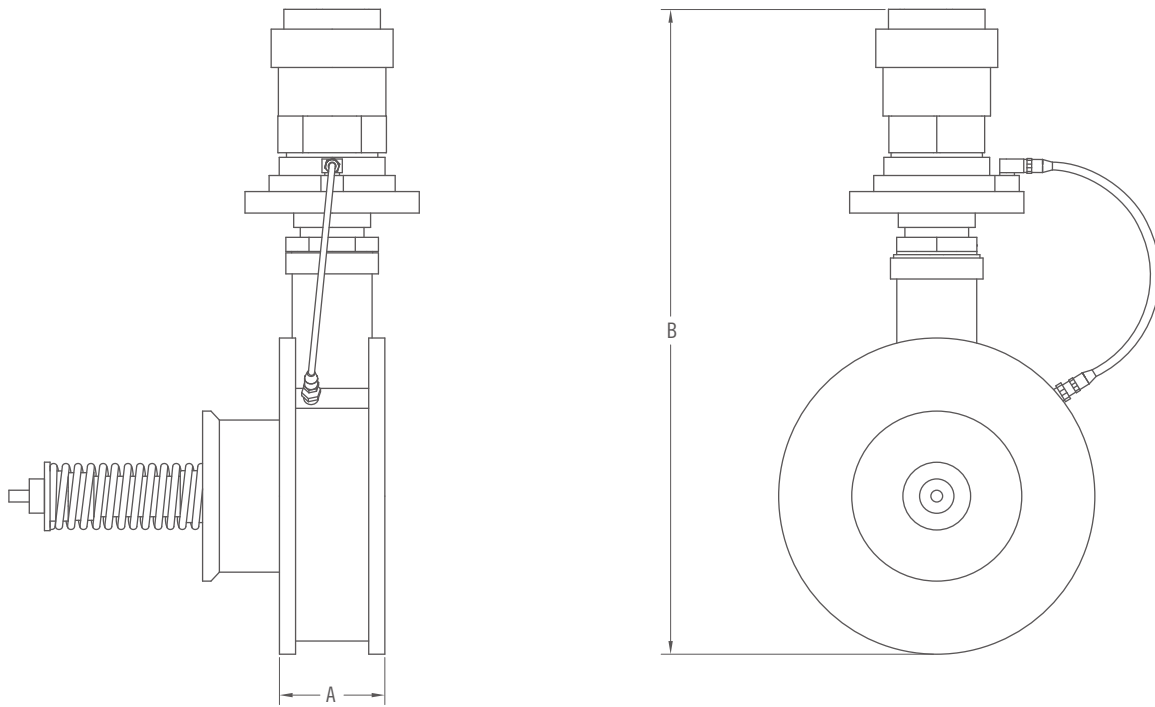

Performance Information

Model SVRPP	DN150 (6")	DN200 (8")
Size	DN 150	DN 200
Foam Inlet Female	R DN50 (2")	R DN65 (2.5")
Flow Range	70-7000 l/min (18-1850 gpm)	150-15000 l/min (40-3963 gpm)
Connection Water	6.0" between flange, DIN PN-16	8.0" between flange, DIN PN-16
Connection Foam	DN50 (2") Female BSP	DN65 (2.5") Female BSP
Proportioning Rate (pre-calibrated)	SOLBERG Foam Concentrates	SOLBERG Foam Concentrates
Inlet Pressure (max)	16 bar (232 psi)	16 bar (232 psi)
Inlet Pressure (min)	5 bar (73 psi)	5 bar (73 psi)
Pipe Length Upstream	762 mm (30.0")	1000 mm (40.0")
Pipe Length Downstream	762 mm (30.0")	1000 mm (40.0")
Flange Type	DIN PN16	DIN PN16
Between Flange Proportions (Dimension A)	69 mm (2.75")	88 mm (3.5")
Height (Dimension B)	330 mm (13.0")	430 mm (17.0")

Note: Over pressurization of 1 bar (14.5 psi) minimum is required on the foam concentrate side.

Ordering Information

PART NO.	DESCRIPTION	APPROXIMATE SHIPPING WEIGHT	
		lb	kg
RATIO CONTROLLERS / VARIABLE RANGE			
30202	Ratio Controller - Variable Range Pump Proportioner, Model SVRPP DN150 (6")	35	16
30203	Ratio Controller - Variable Range Pump Proportioner, Model SVRPP DN200 (8")	106	48





SOLBERGFOAM.COM

FORM NUMBER F-2012012-1_EN

COPYRIGHT © 2013. ALL RIGHTS RESERVED.
SOLBERG®, ARCTIC™ AND ATC™ ARE TRADEMARKS OF
THE SOLBERG COMPANY OR ITS AFFILIATES.

AMERICAS

THE SOLBERG COMPANY
1520 Brookfield Avenue
Green Bay, WI 54313
USA
Tel: +1 920 593 9445

EMEA

SOLBERG SCANDINAVIAN AS
Radøyvegen 721 - Olsvollstranda
N-5938 Sæbøvågen
Norway
Tel: +47 56 34 97 00

ASIA-PACIFIC

SOLBERG ASIA PACIFIC PTY LTD
3 Charles Street
St Marys NSW 2760
Australia
Tel: +61 2 9673 5300